

DATE OF ISSUE	28.06.18	09.04.21	27.10.25																	
DRAWING PACKAGE VERSION	1	2	3																	

GENERAL

H8097-G1	SITE SPECIFICATIONS	A	AB	A																
H8097-G2	OVERALL SITE PLAN	A	AB	A																
H8097-G3	SITE LAYOUT AND SETOUT PLAN	A	AB	A																
H8097-G3-1	ANTENNA LAYOUT PLAN	-	-	A																
H8097-G4	SITE ELEVATION	A	AB	A																

ANTENNAS & TRANSMISSION

H8097-A1	eJV ANTENNA SYSTEM CONFIGURATION - SHEET 1 OF 2	A	AB	A																
H8097-A2	eJV ANTENNA SYSTEM CONFIGURATION - SHEET 2 OF 2	-	-	A																
H8097-A3	PHYSICAL ASSET SUMMARY TABLE	-	-	A																
H8097-P1	OPTUS & VODAFONE RF PLUMBING DIAGRAM	A	AB	A																

STRUCTURAL

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

ELECTRICAL

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

SHELTER

H8097-F1	EQUIPMENT SHELTER LAYOUT PLAN	A	AB	A																
----------	-------------------------------	---	----	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

LEASE / LICENCE

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

REFERENCE DOCUMENTS

OSD-100	STANDARD CONSTRUCTION NOTES	-	-	C																
OSD-171-1	SITE SIGNAGE TYPICAL GROUND SITE	-	-	B																
OSD-171-3	SIGNAGE LEGEND AND NOTES	-	-	B																
292920_1	POLE CERTIFICATE BY CIVILMART DATED ON 03/09/2025	-	-	0																
16721	GAMCORP FOUNDATION CERTIFICATE DATED 02/09/2025	-	-	0																
SC184419 OPT	SITEPRO 1 STRUCTURAL ANALYSIS AND DESIGN CERTIFICATE DATED ON 15/10/2025	-	-	0																
SP20132-H8097	700mm FACE WIDTH 1000mm OUTRIGGER HEADFRAME SHEET 1 OF 3	-	-	0																
SP20132-H8097	700mm FACE WIDTH 1000mm OUTRIGGER HEADFRAME SHEET 2 OF 3	-	-	0																
SP20132-H8097	700mm FACE WIDTH 1000mm OUTRIGGER HEADFRAME SHEET 3 OF 3	-	-	0																

DISTRIBUTION

OPTUS	SUHAIB OBAID	1	1	1																
CPS TECH	BRETT THOMSON	-	-	1																



OPTUS SITE - H8097

AUSTINS FERRY

JV SITE ID: JH3038

LOT 13 PLAN 178737

POIMENA RESERVE, WAKEHURST RD

AUSTINS FERRY, TAS 7011

UPGRADE 5G (eJV)

OPTUS WORK AUTHORITY N° 658102




TECHNOLOGY & INFRASTRUCTURE

FOR CONSTRUCTION

Drawing No.
H8097 - 00

LOT 13 PLAN 178737
POIMENA RESERVE, WAKEHURST RD
AUSTINS FERRY, TAS 7011

OPTUS SITE H8097
(RFNSA NO: 7011007)

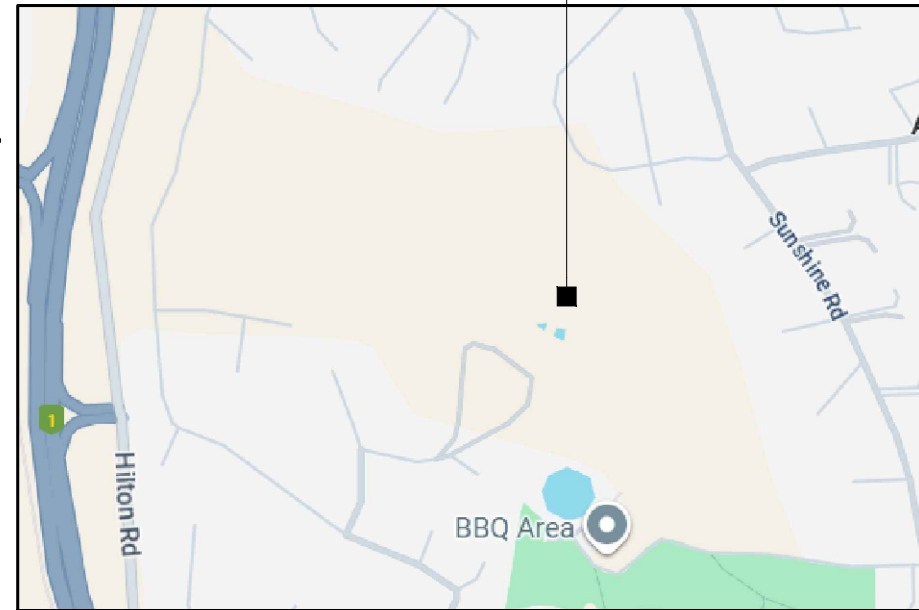

TOPOGRAPHIC MAP ... COPYRIGHT © GOOGLE MAPS

SOURCE: RFNSA	
DATUM: MGA (GDA94)	ZONE: 55
REF LOCATION:	€ MONOPOLE
EASTING	520 051
NORTHING	5 263 789
LATITUDE	-42.77817°
LONGITUDE	147.24512°
WGS84 DATUM (USED BY GOOGLE EARTH® AND GPS DEVICES) CAN BE CONSIDERED SAME AS GDA94 (SOURCE: "GEOCENTRIC DATUM OF AUSTRALIA TECHNICAL MANUAL" VERSION 2.3)	

1. EXISTING OPTUS 27m HIGH CONCRETE MONOPOLE (SR3-BM27-585).
2. STRUCTURAL ADEQUACY OF EXISTING MONOPOLE AND ITS FOUNDATION ARE CONFIRMED BY CIVILMART. REFER TO POLE CERT 292920_1 DATED ON 03/09/2025 & GAMCORP FOUNDATION CERTIFICATE 16721 DATED 02/09/2025 FOR DETAILS.
3. NEW OPTUS & VODAFONE PANEL ANTENNAS TO BE INSTALLED ON NEW ANTENNA MOUNTS ON NEW COLLAR MOUNT. NEW OPTUS & VODAFONE RRU's TO BE INSTALLED ON NEW RRU MOUNT ON NEW COLLAR MOUNT. REFER TO DRGS. SP20132-H8097 FOR DETAILS.
4. STRUCTURAL ADEQUACY OF NEW COLLAR MOUNT AND NEW ANTENNA/RRU MOUNT HAS BEEN DESIGNED AND CERTIFIED BY SITE PR01. REFER TO CERT_SC184419 OPT DATED ON 15/10/2025 FOR DETAILS.
5. ANTENNA MAINTENANCE ACCESS ARRANGEMENT IS VIA EWP BY QUALIFIED RIGGER PERSONNEL ONLY.

EXISTING OPTUS ZONECOOL C3 (3.0m x 2.5m) EQUIPMENT SHELTER PAINTED COLORBOND 'PALE EUCALYPT' SUPPORTED ON STRIP FOOTINGS AND PIERS.

THIS SITE IS LINKED TO THE NETWORK VIA RADIO.

1. ACCESS SITE VIA WAKEHURST ROAD TO POIMENA RESERVE. CONTINUE TO THE UPPER CARPARK AND TURN RIGHT AT THE LARGE WATER TOWER.
2. UNLOCK GATE USING OPTUS LOCK. FOLLOW GRAVEL TRACK TO SITE. VEHICLE ACCESS IS SUITABLE FOR 2WD. REFER TO OPTUS SITE ACCESS PROTOCOLS FOR MORE DETAILS.
3. SITE ACCESS CONTACT DETAILS: CONTACT JASMINE YOUNG, E: gccmail@gcc.tas.gov.au, Ph: (03) 6216 6800. FOR ARRANGING SITE ACCESS AND NOTIFICATION PRIOR TO COMMENCING WORKS.

1. EXISTING EME TRANSMITTING ANTENNAS & CABLING.
2. MANUAL HANDLING.
3. WORKING AT HEIGHTS.
4. SLIP, TRIP AND FALLS.
5. ELECTRICAL HAZARDS.
6. EXTREME WEATHER CONDITIONS / LIGHTNING.
7. SUN EXPOSURE.
8. WILDLIFE / INSECTS.
9. 4WD REQUIRED.

1. SITE SIGNAGE SHALL BE IN ACCORDANCE WITH OSD-171-1 (GROUND SITE) AND OSD-171-3 (SIGNAGE LEGEND AND NOTES).
2. REPLACE EXISTING OUTDATED HAZARDOUS VOLTAGE SIGN WITH NEW HAZARDOUS VOLTAGE SIGN ON EXISTING METER BOX OUTSIDE SHELTER.
3. MERCS-5 SIGNAGE TO BE INSTALLED ON BACK OF NEW PANEL ANTENNAS.
4. REPLACE EXISTING OUTDATED SITE ENQUIRY SIGNAGE WITH NEW SITE ENQUIRY ON EXISTING SHELTER DOOR.

REFER TO EME GUIDE (EMEG) FOR LATEST EME EXCLUSION ZONES FOR EXISTING ANTENNAS AT THIS SITE.

ALL WORKS ARE TO BE IN ACCORDANCE WITH THE OPTUS CONSTRUCTION SPECIFICATION (OSD-010), OPTUS EARTHING SPECIFICATION (OSD-020) AND OPTUS SHELTER SPECIFICATION (OSD-040). LATEST EDITION WITH AMENDMENTS AT TIME OF CONSTRUCTION IS TO APPLY.

EXISTING OPTUS 50A THREE PHASE POWER SUPPLY IS SUFFICIENT FOR THE PROPOSED UPGRADE.

ALL NEW EQUIPMENT AND FEEDER CABLING SHOULD BE BONDED TO THE EXISTING EARTH SYSTEM.
ALL WALKWAYS, HANDRAILS AND EXTRANEIOUS METALWORK ASSOCIATED WITH THE OPTUS INSTALLATION ARE
TO BE BONDED TO THE EXISTING EARTH SYSTEM.
FOR DETAILS OF METHODOLOGY, REFER TO OPTUS EARTHING SPECIFICATION, OSD-020 (LATEST EDITION AT TIME OF
CONSTRUCTION IS TO APPLY).

1. BUILD CONTRACTOR TO ESTABLISH FALL ZONE PRIOR TO COMMENCING ANY CONSTRUCTION OR MAINTENANCE INCLUDING ANTENNA IN ORDER TO ADHERE WITH HEALTH AND SAFETY REGULATIONS.
2. THERE MIGHT BE A RISK THAT THE MOUNTS/SUPPORT STRUCTURE FAILING DUE TO LOOSENING OF BOLTS/NUTS OVER TIME INCREASING THE RISK FOR FALLING OBJECTS (E.G. REPLACEMENT OF EQUIPMENT).
3. THERE MIGHT BE A RISK OF BEING CONFRONTED WITH POISONOUS SNAKES AND SPIDERS WHEN ATTENDING A SITE WEAR PROPER PPE GEARS AND APPROPRIATE CARE MUST BE TAKEN.
4. SITE SURROUNDING AREA LOOKS MUD. PLEASE AVOID RAINY SESSION DURING CONSTRUCTION.
5. 4WD VEHICLE IS REQUIRED FOR ACCESS, AS THE SITE IS LOCATED IN A STEEPLY INCLINED AREA.
6. OVERGROWN GRASS/VEGETATION AROUND SHELTER BOUNDARY/ACCESS DOOR TO BE CLEARED BY MAINTENANCE TEAM.

A	27.10.25	ISSUED FOR CONSTRUCTION (UPGRADE 5G (eJV))	ALL TELECOMS	VB	SA		GL		JM		
AB	09.04.21	AS BUILT	METASITE	AU	JB		GC		PJ		
A	28.06.18	ISSUED FOR CONSTRUCTION (eJV GREENFIELD PROJECT)	METASITE	JM	JB		GC		PJ		
Rev	Date	Revision Details	Consultant	CAD	Designer		Verifier		Approver		



Client:

Project:

MOBILE NETWORK
AUSTRALIA
SITE No:- H8097
AUSTINS FERRY

LOT 13 PLAN 178737 WAKEHURST ROAD

Drawing Title:

SITE SPECIFICATIONS

Drawing Status:


FOR CONSTRUCTION

Drawing No.

H8097-G1

revision

A





EXISTING/NEW OPTUS/VODAFONE
INSTALLATION. REFER TO DRG.
H8097-G3 FOR DETAILS

PROPOSED EWP SET UP
LOCATION. (REFER TO NOTE 3)

EXISTING TELSTRA 3m
WIDE SITE ACCESS TRACK

EXISTING DIRT ACCESS
TRACK (UPHILL)

EXISTING SITE CONSUMER
MAINS IN U/G CONDUIT

EXISTING FENCE LINE (TYP.)

EXISTING TREE (TYP.)

EXISTING WATER RESERVOIR

EXISTING PUMP BUILDING

EXISTING 3 PHASE POWER SUPPLY
POLE WITH TRANSFORMER #100544
(SITE POINT OF SUPPLY)

EXISTING SITE ACCESS WITH LOCKABLE GATE



NOTES:

1. ALL INFORMATION TO BE CHECKED ON SITE PRIOR TO FABRICATION AND CONSTRUCTION.
2. DRAWINGS BASED ON INFORMATION PROVIDED BY OTHERS.
3. CONSTRUCTION CONTRACTOR TO CONFIRM SUITABILITY OF PROPOSED EWP SET-UP/PARKING LOCATION ON SITE PRIOR TO WORK COMMENCING.
4. SERVICES INFORMATION CONTAINED ON THIS DRAWING IS INDICATIVE ONLY AND REFERENCE SHOULD BE MADE TO THE AUTHORITIES DRAWINGS TO CONFIRM ACCURACY AND COMPLETENESS. WHERE INFORMATION IS AVAILABLE, THE SUB-SURFACE SERVICES INSTALLED BY AGENTS OTHER THAN AUTHORITIES HAVE BEEN SHOWN, BUT ADDITIONAL UNDOCUMENTED SERVICES MAY BE PRESENT. SHOULD THE CONTRACTOR BELIEVE THAT SUB-SURFACE SERVICES ARE AT RISK OF DAMAGE DURING CONSTRUCTION, THE CONTRACTOR SHOULD NOTIFY THE RELEVANT AUTHORITIES AND ESTABLISH THE EXACT LOCATION OF THE SERVICES.

LEGEND

- E ——— E ——— EXISTING O/H POWER SUPPLY
- e ——— e ——— EXISTING U/G CONSUMER MAINS
- / ——— / ——— EXISTING FENCE LINE
- ······ ——— ······ ——— PROPERTY BOUNDARY

OVERALL SITE PLAN

SCALE 1:2000

Rev	Date	Revision Details	Consultant	CAD	Designer	Verifier	Approver
A	27.10.25	ISSUED FOR CONSTRUCTION (UPGRADE 5G (eJV))	ALL TELECOMS	VB	SA	GL	JM
AB	09.04.21	AS BUILT	METASITE	AU	JB	GC	PJ
A	28.06.18	ISSUED FOR CONSTRUCTION (eJV GREENFIELD PROJECT)	METASITE	JM	JB	GC	PJ



Client:

Project:

MOBILE NETWORK
AUSTRALIA
SITE No:- H8097
AUSTINS FERRY

LOT 13 PLAN 178737 WAKEHURST ROAD

Drawing Title:

OVERALL SITE PLAN

Drawing Status:

FOR CONSTRUCTION

Drawing No.

H8097-G2

Revision

A



EXISTING OPTUS 2.4m HIGH CHAINWIRE SECURITY FENCE WITH 1.5m WIDE SINGLE ACCESS GATE

EXISTING OPTUS 75mm THICK SINGLE SIZE GRAVEL/RECYCLED CONCRETE OVER WEED MAT WITH TIMBER EDGING

EXISTING OPTUS 200mm HIGH TIMBER STEPS (TYP.)

INSTALL NEW VODAFONE NOKIA A YGE GPS ANTENNA (1 OFF) ON THE TOP OF SHELTER WALL. ENSURE MIN. 500mm HORIZONTAL SEPERATION FROM OTHER GPS ANTENNA

EXISTING OPTUS ZONECOOL C3 EQUIPMENT SHELTER TO BE RECONFIGURED TO ACCOMMODATE EXISTING & PROPOSED EQUIPMENTS. REFER TO DRG. H8097-F1 FOR DETAILS

REPLACE EXISTING OPTUS GPS ANTENNA (1 OFF) WITH NEW OPTUS ERICSSON GNSS GPS ANTENNA (1 OFF) ON THE TOP OF SHELTER WALL

REPLACE EXISTING OUTDATED HAZARDOUS VOLTAGE SIGN WITH NEW HAZARDOUS VOLTAGE SIGN ON EXISTING METER BOX OUTSIDE SHELTER

EXISTING OPTUS HDPE ELECTRICAL DRAW PIT

REPLACE EXISTING OUTDATED SITE ENQUIRY SIGNAGE WITH NEW SITE ENQUIRY ON EXISTING SHELTER DOOR

EXISTING OPTUS 1.5m WIDE SINGLE ACCESS GATE

EXISTING OPTUS SUB-MAINS IN U/G FROM SITE GROUP METER BOX

EXISTING TELSTRA SUB-MAINS FROM SITE GROUP METER

EXISTING SITE GROUP METER BOX ON FREE STANDING "H" FRAME TO HOST OPTUS METER AND TELSTRA ONE WITH ACCESSORIES

EXISTING SITE CONSUMER MAINS IN U/G CONDUIT. APPROX. 260m

EXISTING OPTUS SITE ACCESS ROUTE

REUSE EXISTING OPTUS H&S 9/18 HYBRID CABLE (1 OFF) (LENGTH: 40m) AND SHARED H&S 9/18 HYBRID CABLE (1 OFF) (LENGTH: 40m) TO BE ALLOCATED TO OPTUS TO RUN IN EXISTING OPTUS 450mm WIDE CABLE LADDER

REUSE EXISTING VODAFONE H&S 9/18 HYBRID CABLE (1 OFF) (LENGTH: 40m) AND INSTALL NEW H&S 9/18 (10mm²) HYBRID CABLES (1 OFF) (LENGTH: 40m) FOR VODAFONE TO RUN IN EXISTING OPTUS 450mm WIDE CABLE LADDER

EXISTING TELSTRA FENCE CUT LOCALLY FOR OPTUS CABLE LADDER TO PASS THROUGH

NOTES:

1. ALL ANTENNA ORIENTATIONS ARE IN DEGREE RELATIVE TO TRUE NORTH.
2. REFER TO DRG. H8097-G1 FOR SITE SPECIFICATION NOTES.
3. REFER TO DRG. H8097-A1 TO A3 FOR ANTENNA SYSTEM CONFIGURATIONS.
4. ALL ANCILLARIES TO BE INSTALLED BEHIND ANTENNAS ON NEW MOUNTING POLE.

LEGEND

- 0 e — 0 e — EXISTING OPTUS U/G SUBMAIN CABLE
- T e — T e — EXISTING TELSTRA U/G POWER SUPPLY
- / — / — EXISTING FENCE LINE
- e — e — EXISTING U/G CONSUMER MAINS

ANTENNA LEGEND



- EXISTING OPTUS Ø600 PARABOLIC ANTENNA (1 OFF)
- EXISTING OPTUS 27m HIGH CONCRETE MONOPOLE (SR3-BM27-585)

MGA ZONE	55
E	520 051
N	5 263 789
AT	€ MONOPOLE

- EXISTING TELSTRA COMPOUND FENCE
- EXISTING TELSTRA EQUIPMENT SHELTER

DETAIL SCALE 1:100 1 G2

Rev	Date	Revision Details	Consultant	CAD	Designer	Verifier	Approver
A	27.10.25	ISSUED FOR CONSTRUCTION (UPGRADE 5G (eJV))	ALL TELECOMS	VB	SA	GL	JM
AB	09.04.21	AS BUILT	METASITE	AU	JB	GC	PJ
A	28.06.18	ISSUED FOR CONSTRUCTION (eJV GREENFIELD PROJECT)	METASITE	JM	JB	GC	PJ



Client:

Project:

MOBILE NETWORK AUSTRALIA
SITE No:- H8097
AUSTINS FERRY
LOT 13 PLAN 178737 WAKEHURST ROAD

Drawing Title:

SITE LAYOUT AND SETOUT PLAN

Drawing Status:

FOR CONSTRUCTION

Drawing No.

H8097-G3

Revision

A



NOTES:

1. ALL ANTENNA ORIENTATIONS ARE IN DEGREE RELATIVE TO TRUE NORTH.
2. REFER TO DRG. H8097-G1 FOR SITE SPECIFICATION NOTES.
3. REFER TO DRG. H8097-A1 TO A3 FOR ANTENNA SYSTEM CONFIGURATIONS.

REMOVE EXISTING VODAFONE HUAWEI RRU3952 (L850) (3 OFF), RRU3953 (U9) (3 OFF), RRU3971 (L18) (3 OFF) & RRU3971 (L21) (3 OFF). INSTALL NEW VODAFONE NOKIA RRU AHPB (NR7) (1 OFF PER SECTOR, 3 OFF TOTAL), AHCA (L8.5) (1 OFF PER SECTOR, 3 OFF TOTAL) AND AHEGG (LN18/L21) (2 OFF PER SECTOR, 6 OFF TOTAL) ON NEW RRU MOUNT CONNECTED TO NEW COLLAR MOUNT

REMOVE EXISTING OPTUS HUAWEI RRU3262 (L7) (3 OFF), RRU3936 (U9) (3 OFF), RRU3971 (L18) (3 OFF), RRU3971 (L21) (3 OFF) & RRU3281 (L26) (3 OFF). INSTALL NEW OPTUS ERICSSON RRU4480 (L7/NL9) (1 OFF PER SECTOR, 3 OFF TOTAL), RRU4466 (L18/NL21/L26) (1 OFF PER SECTOR, 3 OFF TOTAL) AND FUTURE RRU (2 OFF PER SECTOR, 6 OFF TOTAL) ON NEW RRU MOUNT CONNECTED TO NEW COLLAR MOUNT

REPLACE EXISTING eJV 12P HUAWEI ASI4517R1 PANEL ANTENNAS (3 OFF) WITH NEW eJV 16P COMMScope RRV2VV-6533D-R8 PANEL ANTENNAS (1 OFF PER SECTOR) (FOR SECTOR 11-J, 21-J, & 31-J) ON NEW ANTENNA MOUNT CONNECTED TO NEW COLLAR MOUNT

REMOVE EXISTING VODAFONE COMBINERS COM2 (E12F03P18) (3 OFF) & COM4 (E14F05P17) (6 OFF). INSTALL NEW VODAFONE COMBINER COM2g (E14F06P81) (1 OFF PER SECTOR, 3 OFF TOTAL) BEHIND NEW PANEL ANTENNAS ON NEW MOUNT

INSTALL NEW OPTUS ERICSSON AIR3268 B78Y (NR35) ANTENNAS (1 OFF PER SECTOR) (FOR SECTOR 12-0, 22-0, & 32-0) ON NEW ANTENNA MOUNT CONNECTED TO NEW COLLAR MOUNT

INSTALL NEW VODAFONE NOKIA AVQL (NR36) ANTENNAS (1 OFF PER SECTOR) (FOR SECTOR 13-V, 23-V, & 33-V) (BELOW OPTUS AAU) ON NEW ANTENNA MOUNT CONNECTED TO NEW COLLAR MOUNT

REPLACE EXISTING COLLAR MOUNT WITH NEW COLLAR MOUNT. REFER TO DRGS. SP20132-H8097 FOR DETAILS

EXISTING OPTUS 27m HIGH CONCRETE MONOPOLE (SR3-BM27-585)

ANTENNA LAYOUT PLAN

DETAIL
SCALE 1:20
2
G3

REMOVE EXISTING OPTUS COMBINERS COM2a (E12F13P25) (3 OFF) & COM3 (E16V90P56) (6 OFF). INSTALL NEW OPTUS REJ FILTER (E14V00P21) (1 OFF PER SECTOR, 3 OFF TOTAL) BEHIND NEW PANEL ANTENNAS ON NEW MOUNT

ANTENNA LEGEND



Rev	Date	Revision Details	Consultant	CAD	Designer	Verifier	Approver
A	27.10.25	ISSUED FOR CONSTRUCTION (UPGRADE 5G (eJV))	ALL TELECOMS	VB	SA	GL	JM



Client:

Project:

MOBILE NETWORK
AUSTRALIA
SITE No:- H8097
AUSTINS FERRY
LOT 13 PLAN 178737 WAKEHURST ROAD

Drawing Title:

ANTENNA LAYOUT PLAN

Drawing Status:

FOR CONSTRUCTION

Drawing No.

H8097-G3-1

Revision

A

A	27.10.25	ISSUED FOR CONSTRUCTION (UPGRADE 5G (eJV))	ALL TELECOMS	VB	SA		GL	JM
AB	09.04.21	AS BUILT	METASITE	AU	JB		GC	PJ
A	28.06.18	ISSUED FOR CONSTRUCTION (eJV GREENFIELD PROJECT)	METASITE	JM	JB		GC	PJ
Rev	Date	Revision Details	Consultant	CAD	Designer		Verifier	Approver



Client:

Project: MOBILE NETWORK
AUSTRALIA
SITE No:- H8097
AUSTINS FERRY
LOT 13 PLAN 178737 WAKEHURST ROAD

Drawing Title:

SITE ELEVATION

Drawing Status:
FOR CONSTRUCTION


Drawing No.
H8097-G4

Revision
A

COPYRIGHT © OPTUS MOBILE PTY LTD ABN 65 054 365 696. ALL RIGHTS RESERVED. VERSION 2.0 NOVEMBER 2013

NOTES:

1. REFER TO DRG. H8097-G1 FOR SITE SPECIFICATION NOTES.
2. REFER TO DRG. H8097-A1 TO A3 FOR ANTENNA SYSTEM CONFIGURATIONS.
3. REFER TO DRG. H8097-G3 & G3-1 FOR EQUIPMENT DETAILS.
4. ALL ASSOCIATED ANCILLARIES TO BE INSTALLED BEHIND NEW ANTENNAS ON NEW MOUNTING POLE.

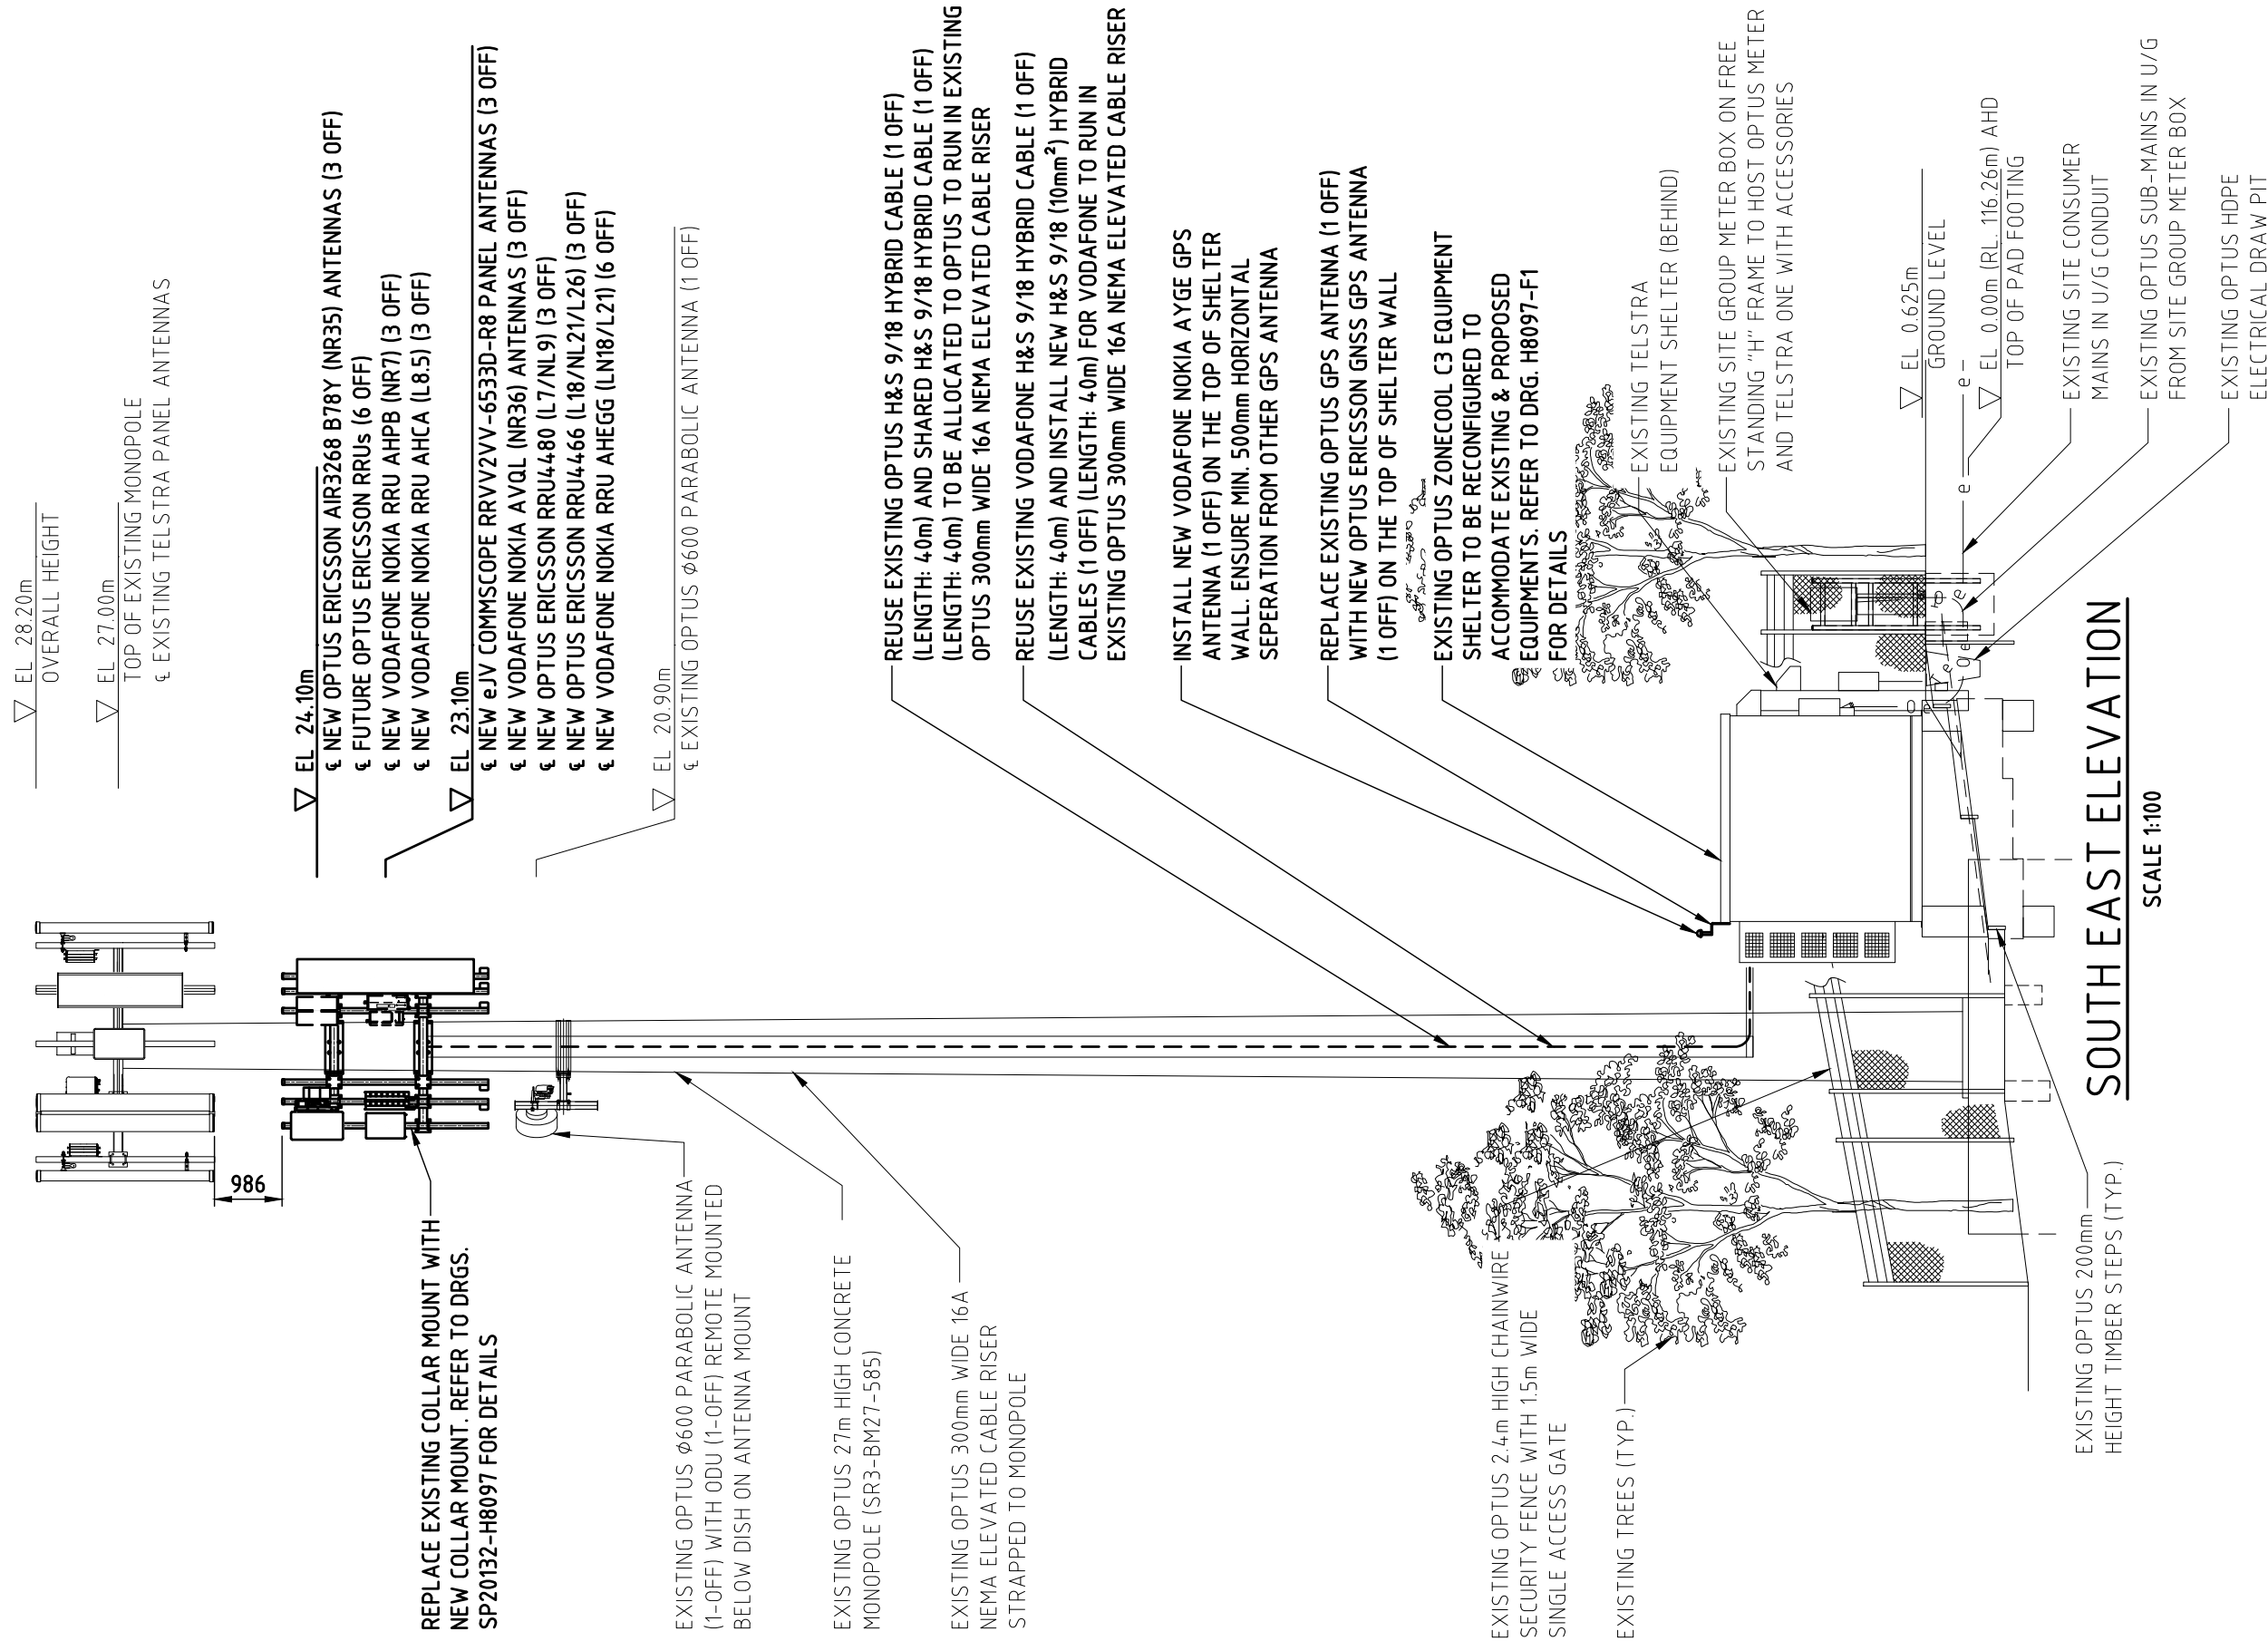

SOUTH EAST ELEVATION

SCALE 1:100

A1 - PHYSICAL ANTENNA GROUP 1 & 2 DETAILS

ANTENNA DETAILS									
PHYSICAL ANTENNA GROUP (N2)		1							
CO-ORDINATES (N5)	LATITUDE	-42.77817							
	LONGITUDE	147.24512							
ANTENNA OPERATOR		JOINT				OPTUS		VODAFONE	
PHYSICAL ANTENNA NUMBER (N3)		1				2		3	
PHYSICAL ANTENNA ID (N4)		11-J				12-O		13-V	
ANTENNA ALIAS		16-PORT TALL 2B				AAU 3500		AAU 3500	
ANTENNA STATUS		NEW				NEW		NEW	
PHYSICAL AZIMUTH (°) (N6)		80				80		80	
PHYSICAL ANT CL EL (m) (N7)		23.1				24.1		23.1	
MECH DOWN-TILT (°)		0				0		0	
MODEL NO.		RRW2VW-6533D-R8				AIR3268 B42		AVQL N78	
MANUFACTURER		COMMS				ERICSSON		NOKIA	
TYPE		PASSIVE				ACTIVE		ACTIVE	
NO. OF RF PORTS / TxRx		16				32T32R		64T64R	
PORT TYPE		4.3-10				SFP		SFP	
BAND CAPABILITY		07 / 09 / 18 / 21 / 23 / 26				35		35	
DIMENSIONS (HxWxD) (mm)		2577 × 498 × 197				567 × 370 × 118		758 × 406 × 155	
WEIGHT (kg)		53				12.5		24	
RF SECTOR & BAND ALLOCATION									
RF SECTOR ID / SUB-SECTOR ID		1		1		11		12	
PHYSICAL ARRAY ID		L11	L21	H12	H22	H13	H23	H14	H24
LOGICAL ANTENNA PORT		LP1 & LP2	LP3 & LP4	LP5 & LP6	LP7 & LP8	LP9 & LP10	LP11 & LP12	LP13 & LP14	LP15 & LP16
PHYSICAL ANTENNA PORT (OEM LABEL)		3 & 4	1 & 2	15 & 16	5 & 6	9 & 10	13 & 14	7 & 8	11 & 12
ETILT (N8)		2	2	2	2	4	4	4	4
ARRAY BEAM OFFSET (°)		0		0		-27		27	
ARRAY BEAM AZIMUTH (°)		80		80		53		107	
ARRAY BAND CAPABILITY		7,8,9	7,8,9	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26
ASSIGNED ARRAY OPERATOR		V	O	O	O	V	V	V	V
ASSIGNED RF PORT FREQUENCY 1		07/85	07/09	18/21/26	18/21/26	18/21	18/21	18/21	18/21
ASSIGNED RF PORT FREQUENCY 2									
ASSIGNED RF PORT FREQUENCY 3									
ASSIGNED RF PORT FREQUENCY 4									

2									
-42.77817									
147.24512									
JOINT					OPTUS		VODAFONE		
1					2		3		
21-J					22-O		23-V		
16-PORT TALL 2B					AAU 3500		AAU 3500		
NEW					NEW		NEW		
200					200		200		
23.1					24.1		23.1		
0					0		0		
RRW2VW-6533D-R8					AIR3268 B42		AVQL N78		
COMMS					ERICSSON		NOKIA		
PASSIVE					ACTIVE		ACTIVE		
16					32T32R		64T64R		
4.3-10					SFP		SFP		
07 / 09 / 18 / 21 / 23 / 26					35		35		
2577 × 498 × 197					567 × 370 × 118		758 × 406 × 155		
53					12.5		24		
2		2		21		22		2	2
L11	L21	H12	H22	H13	H23	H14	H24		
LP1 & LP2	LP3 & LP4	LP5 & LP6	LP7 & LP8	LP9 & LP10	LP11 & LP12	LP13 & LP14	LP15 & LP16		
3 & 4	1 & 2	15 & 16	5 & 6	9 & 10	13 & 14	7 & 8	11 & 12		
2	5	4	4	3	3	3	3	6	-3
0		0		-27		27			
200		200		173		227			
7,8,9	7,8,9	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	35	35
V	O	O	O	V	V	V	V		
07/85	07/09	18/21/26	18/21/26	18/21	18/21	18/21	18/21		

eJV ANTENNA SYSTEM CONFIGURATION FOR SECTOR 1 & 2

NOTES:

1. THIS ANTENNA TABLE SHALL BE READ IN CONJUNCTION WITH THE DETAIL RF PLUMBING DRAWING FOR THIS SITE.
2. A PHYSICAL SECTOR GROUP IS DEFINED AS A GROUP OF ANTENNAS GENERALLY ORIENTATED WITH SIMILAR AZIMUTHS AND EACH GROUP IS ASSIGNED A NUMBER 1, 2, 3, 4, ETC. THE PHYSICAL SECTOR GROUP MAY INCLUDE SINGLE BEAM OR MULTI-BEAM ANTENNAS. IN THE CASE OF MULTI-BEAM ANTENNAS THE RF SECTOR MAY DIFFER TO THE PHYSICAL SECTOR.
3. THE PHYSICAL ANTENNA NUMBER IS DEFINED BY ASSIGNING SEQUENCED NUMBERS TO EACH JV OPERATOR’S ANTENNAS WITHIN A PHYSICAL SECTOR GROUP, STARTING FROM LEFT TO RIGHT, TOP TO BOTTOM.
4. THE PHYSICAL ANTENNA ID IS DEFINED BY THE NUMBER MADE UP BY CONCATENATING THE PHYSICAL SECTOR GROUP NUMBER WITH THE PHYSICAL ANTENNA NUMBER & THE FIRST LETTER FROM THE OPERATOR’S NAME OR JOINT (O, V, J), SAME AS THE SAO NUMBER, AS SPECIFIED IN OSD-070 SECTION 5.6.
5. ANTENNA CO-ORDINATES ARE TO BE IN GDA94/GDA2020 REFERENCE SYSTEM, SPECIFIED FOR CENTRE OF EACH SECTOR TO NEAREST METRE.
6. THE PHYSICAL AZIMUTH (°) IS DEFINED AS THE DIRECTION OF THE PHYSICAL ANTENNA BORE SIGHT WITH RESPECT TO TRUE NORTH. AZIMUTHS OF EACH BEAM OF MULTI-BEAM ANTENNAS ARE NOT DOCUMENTED IN THIS TABLE.
7. THE PHYSICAL ANT CL EL (m) IS DEFINED AS THE MID-HEIGHT OF THE PHYSICAL ANTENNA. THE HEIGHT OF INDIVIDUAL BEAMS OR DIFFERENT SEGMENTS OF MULTI-BEAM OR HYBRID ANTENNAS (IPAA) ARE NOT DOCUMENTED IN THIS TABLE.
8. ELECTRICAL DOWN-TILTS ARE ONLY ACCURATE AT TIME OF BUILD AS THEY ARE FREQUENTLY OPTIMISED. ALWAYS REFER TO CURRENT VALUES IN MNIS.

A	27.10.25	ISSUED FOR CONSTRUCTION (UPGRADE 5G (eJV))		ALL TELECOM	VB	SA		GL		JM					
AB	09.04.21	AS BUILT		METASITE	AU	JB		GC		PJ					
A	28.06.18	ISSUED FOR CONSTRUCTION (eJV GREENFIELD PROJECT)		METASITE	JM	JB		GC		PJ					
Rev	Date	Revision Details		Consultant	CAD	Designer		Verifier		Approver					





Client:

Project:

MOBILE NETWORK AUSTRALIA
SITE No:- H8097
AUSTINS FERRY
LOT 13 PLAN 178737 WAKEHURST ROAD

Drawing Title:

eJV ANTENNA SYSTEM
CONFIGURATION - SHEET 1 OF 2

Drawing Status:

H8097-A1

Revision

A

ANTENNA DETAILS													
PHYSICAL ANTENNA GROUP (N2)		3											
CO-ORDINATES (N5)	LATITUDE	-42.77817											
	LONGITUDE	147.24512											
ANTENNA OPERATOR		JOINT						OPTUS		VODAFONE			
PHYSICAL ANTENNA NUMBER (N3)		1						2		3			
PHYSICAL ANTENNA ID (N4)		31-J						32-O		33-V			
ANTENNA ALIAS		16-PORT TALL 2B						AAU 3500		AAU 3500			
ANTENNA STATUS		NEW						NEW		NEW			
PHYSICAL AZIMUTH (°) (N6)		340						340		340			
PHYSICAL ANT CL EL (m) (N7)		23.1						24.1		23.1			
MECH DOWN-TILT (°)		0						0		0			
MODEL NO.		RRVV2VV-6533D-R8						AIR3268 B42		AVQL N78			
MANUFACTURER		COMMS						ERICSSON		NOKIA			
TYPE		PASSIVE						ACTIVE		ACTIVE			
NO. OF RF PORTS / TxRx		16						32T32R		64T64R			
PORT TYPE		4.3-10						SFP		SFP			
BAND CAPABILITY		07 / 09 / 18 / 21 / 23 / 26						35		35			
DIMENSIONS (HxWxD) (mm)		2577 × 498 × 197						567 × 370 × 118		758 × 406 × 155			
WEIGHT (kg)		53						12.5		24			
RF SECTOR & BAND ALLOCATION													
RF SECTOR ID / SUB-SECTOR ID		3		3		31		32		3		3	
PHYSICAL ARRAY ID		L11	L21	H12	H22	H13	H23	H14	H24				
LOGICAL ANTENNA PORT		LP1 & LP2	LP3 & LP4	LP5 & LP6	LP7 & LP8	LP9 & LP10	LP11 & LP12	LP13 & LP14	LP15 & LP16				
PHYSICAL ANTENNA PORT (OEM LABEL)		3 & 4	1 & 2	15 & 16	5 & 6	9 & 10	13 & 14	7 & 8	11 & 12				
ETILT (N8)		2	3	3	3	3	3	3	3	6		-3	
ARRAY BEAM OFFSET (°)		0		0		-27		27					
ARRAY BEAM AZIMUTH (°)		340		340		313		7					
ARRAY BAND CAPABILITY		7,8,9	7,8,9	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	18,21,23,26	35		35	
ASSIGNED ARRAY OPERATOR		V	O	O	O	V	V	V	V				
ASSIGNED RF PORT FREQUENCY 1		07/85	07/09	18/21/26	18/21/26	18/21	18/21	18/21	18/21				
ASSIGNED RF PORT FREQUENCY 2													
ASSIGNED RF PORT FREQUENCY 3													
ASSIGNED RF PORT FREQUENCY 4													

1. THIS ANTENNA TABLE SHALL BE READ IN CONJUNCTION WITH THE DETAIL RF PLUMBING DRAWING FOR THIS SITE.
2. A PHYSICAL SECTOR GROUP IS DEFINED AS A GROUP OF ANTENNAS GENERALLY ORIENTATED WITH SIMILAR AZIMUTHS AND EACH GROUP IS ASSIGNED A NUMBER 1, 2, 3, 4, ETC. THE PHYSICAL SECTOR GROUP MAY INCLUDE SINGLE BEAM OR MULTI-BEAM ANTENNAS. IN THE CASE OF MULTI-BEAM ANTENNAS THE RF SECTOR MAY DIFFER TO THE PHYSICAL SECTOR.
3. THE PHYSICAL ANTENNA NUMBER IS DEFINED BY ASSIGNING SEQUENCED NUMBERS TO EACH JV OPERATOR'S ANTENNAS WITHIN A PHYSICAL SECTOR GROUP, STARTING FROM LEFT TO RIGHT, TOP TO BOTTOM.
4. THE PHYSICAL ANTENNA ID IS DEFINED BY THE NUMBER MADE UP BY CONCATENATING THE PHYSICAL SECTOR GROUP NUMBER WITH THE PHYSICAL ANTENNA NUMBER & THE FIRST LETTER FROM THE OPERATOR'S NAME OR JOINT (O, V, J), SAME AS THE SAO NUMBER, AS SPECIFIED IN OSD-070 SECTION 5.6.
5. ANTENNA CO-ORDINATES ARE TO BE IN GDA94/GDA2020 REFERENCE SYSTEM, SPECIFIED FOR CENTRE OF EACH SECTOR TO NEAREST METRE.
6. THE PHYSICAL AZIMUTH (°) IS DEFINED AS THE DIRECTION OF THE PHYSICAL ANTENNA BORE SIGHT WITH RESPECT TO TRUE NORTH. AZIMUTHS OF EACH BEAM OF MULTI-BEAM ANTENNAS ARE NOT DOCUMENTED IN THIS TABLE.
7. THE PHYSICAL ANT CL EL (m) IS DEFINED AS THE MID-HEIGHT OF THE PHYSICAL ANTENNA. THE HEIGHT OF INDIVIDUAL BEAMS OR DIFFERENT SEGMENTS OF MULTI-BEAM OR HYBRID ANTENNAS (IPAA) ARE NOT DOCUMENTED IN THIS TABLE.
8. ELECTRICAL DOWN-TILTS ARE ONLY ACCURATE AT TIME OF BUILD AS THEY ARE FREQUENTLY OPTIMISED. ALWAYS REFER TO CURRENT VALUES IN MNIS.

												Client: 	Project: MOBILE NETWORK AUSTRALIA SITE No:- H8097 AUSTINS FERRY LOT 13 PLAN 178737 WAKEHURST ROAD	Drawing Title: eJV ANTENNA SYSTEM CONFIGURATION - SHEET 2 OF 2		
A 27.10.25 ISSUED FOR CONSTRUCTION (UPGRADE 5G (eJV))		ALL TELECOMS VB SA GL JM		Drawing Status: FOR CONSTRUCTION		Drawing No. H8097-A2	Revision A									
Rev	Date	Revision Details				Consultant	CAD	Designer	Verifier	Approver						

COPYRIGHT © OPTUS MOBILE PTY LTD ABN 65 054 365 696. ALL RIGHTS RESERVED. VERSION 2.0 NOVEMBER 2013

20100

100

0

10

20

30

40

50mm

A3

PHYSICAL ASSET SUMMARY TABLE

[illegible][illegible]

COAXIAL FEEDER / HFDC TRUNK CABLES							
CABLE ALIAS	STATUS	LENGTH (m)	OPERATOR	PHY ANT GRP	QTY	COAX BAND ASIGNMENT	MFR
HFDC 9/18 (C6 ASSUMED)	EXISTING	40	O	1	2	LBHB	H+S
HFDC 9/18 (C6 ASSUMED)	EXISTING	40	V	1	1	LBHB	H+S
HFDC 9/18 C10	NEW	40	V	1	1	LBHB	H+S

NOTES:


1. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH RF PLUMBING DRAWING H8097-P1.
2. INFORMATION IN THE TABLES SUPPLIED AND VERIFIED BY OPTUS.
3. ANCILLARIES REFER TO ITEMS AT OR NEAR THE ANTENNA.
4. ALL RF TAILS NOT TO BE MORE THAN 5m.
5. TRUNK LENGTH ARE ESTIMATED, ROUNDED UP TO THE NEXT 10m.


														Client:		Project: MOBILE NETWORK AUSTRALIA SITE No:- H8097 AUSTINS FERRY LOT 13 PLAN 178737 WAKEHURST ROAD		Drawing Title: PHYSICAL ASSET SUMMARY TABLE					
																		Drawing Status: FOR CONSTRUCTION				Drawing No. H8097-A3	
A 27.10.25 ISSUED FOR CONSTRUCTION (UPGRADE 5G (e.V))										ALL TELECOS		VB	SA		GL		JM						
Rev	Date	Revision Details								Consultant	CAD	Designer	Verifier	Approver									

COPYRIGHT © OPTUS MOBILE PTY LTD ABN 65 054 365 696. ALL RIGHTS RESERVED. VERSION 2.0 NOVEMBER 2013

201001020304050mm

A3



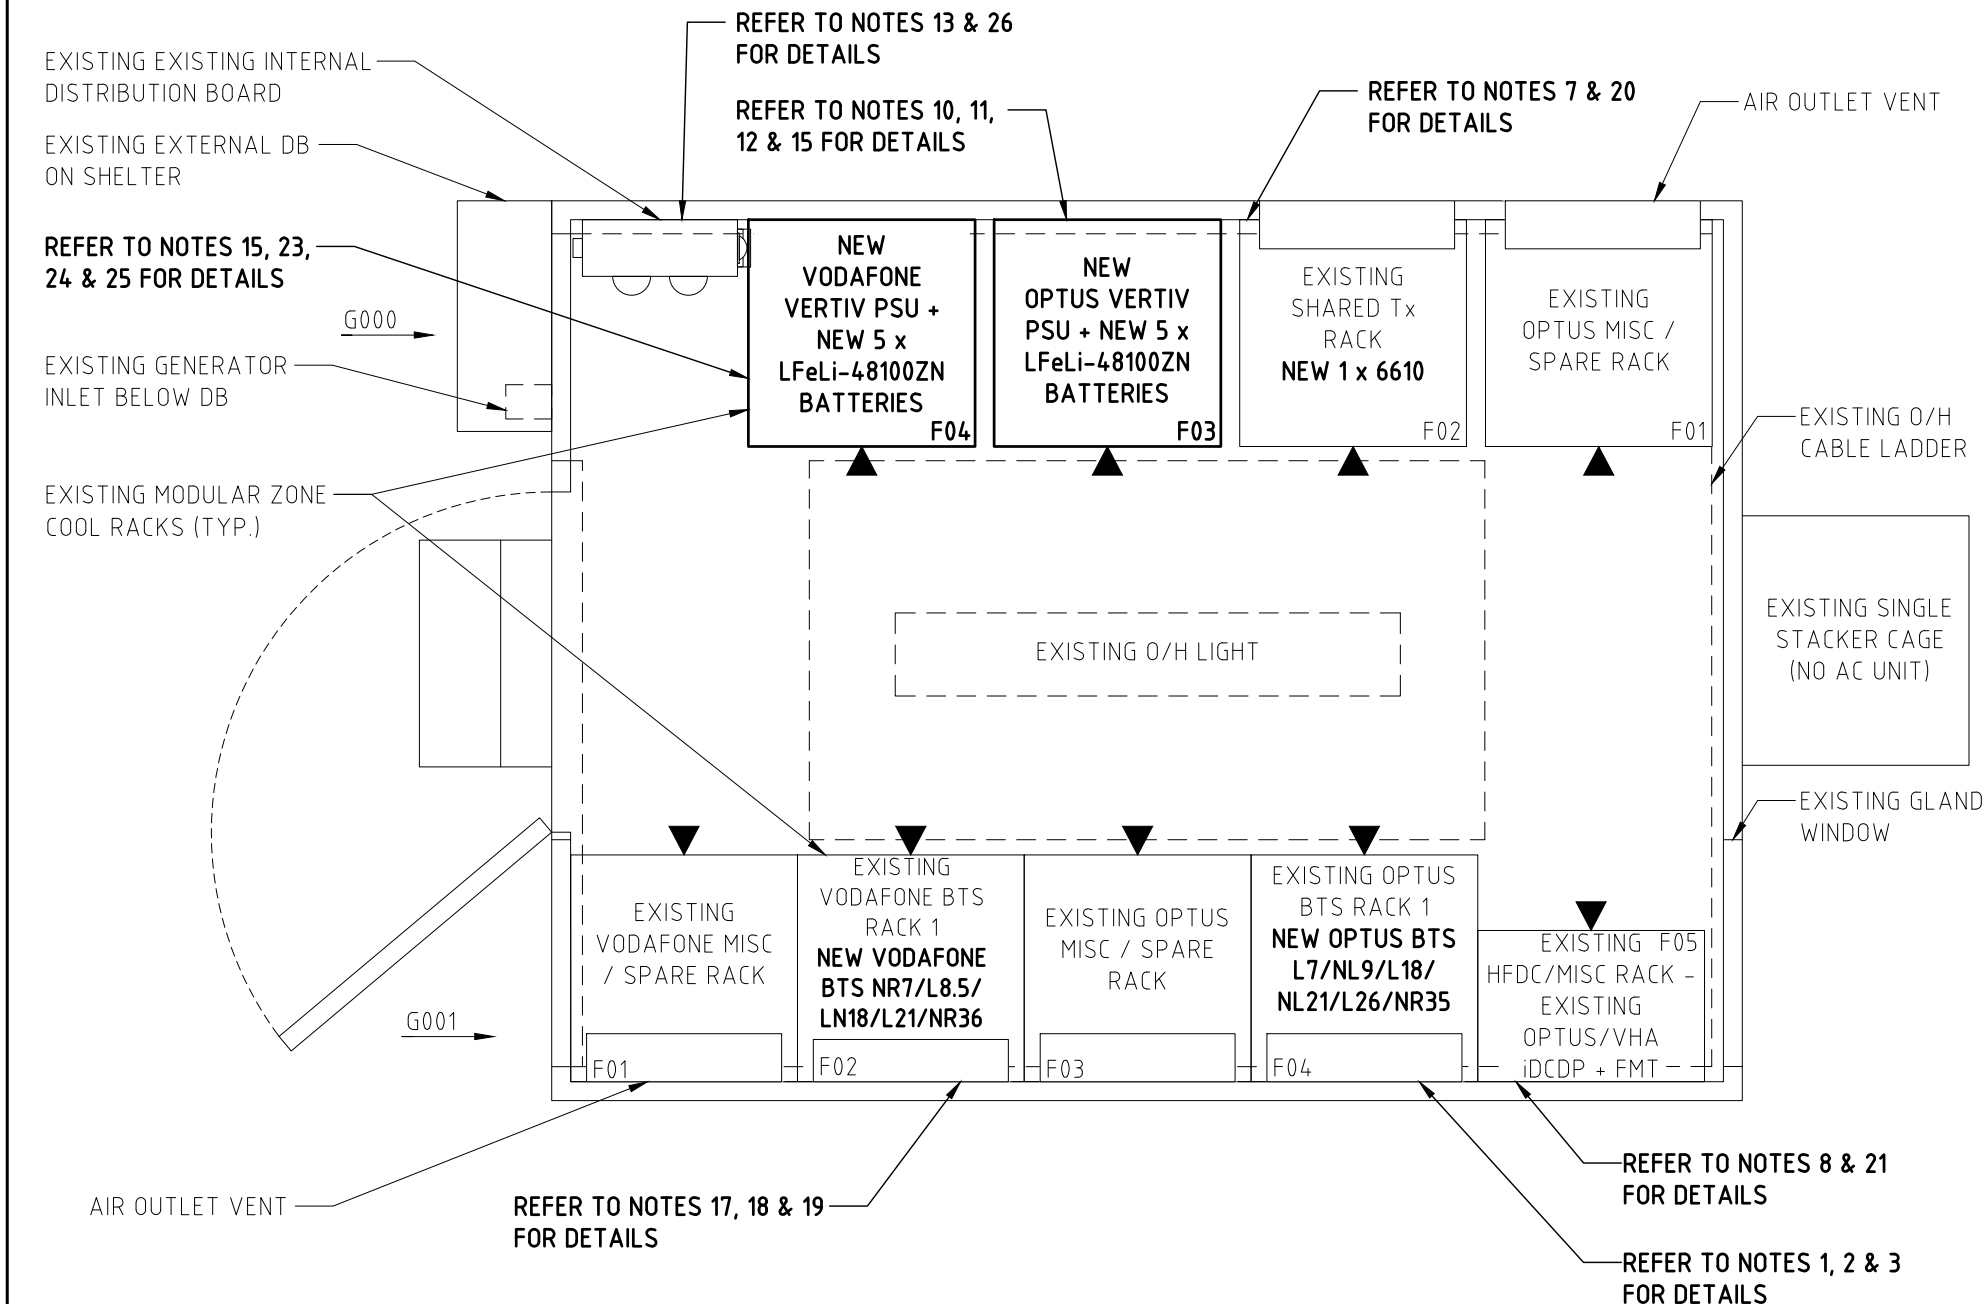

- DC POWER UPGRADE:**
- 23. REMOVE EXISTING VODAFONE HUAWEI PSU (1 OFF) WITH EXISTING 3kW RECTIFIERS (6 OFF) AND LPFG12-100S BATTERY STRINGS (5 OFF) FROM THE RACK AT G000F04.
 - 24. INSTALL NEW VODAFONE 27kW VERTIV PSU WITH NEW 3kW RECTIFIERS (6 OFF) AT G000F04. UNEQUIPPED RECTIFIER MODULE POSITIONS IN VODAFONE PSU MUST HAVE BLANKING PLATES FITTED.
 - 25. INSTALL NEW LFeLi-48100ZN BATTERIES (5 OFF) IN RACK AT G000F04.
 - 26. REPLACE EXISTING 32A 1P CB (3 OFF) WITH NEW 40A 1P CB (3 OFF) FOR VODAFONE PSU ON THE DISTRIBUTION BOARD.
- ADDITIONAL NOTES:**
- 27. CLEAN ALL THE DUST AND DIRT FOR THE WIRE MESH PROTECTING THE FAN IN THE ZONECOOL SHELTER.

EQUIPMENT SHELTER LAYOUT PLAN
SCALE 1:20

- SHELTER DETAILS:**
INTERNATIONAL COMMUNICATIONS SHELTERS (ICS) ZONECOOL TYPE C3
SANDWICH PANEL SHELTER, COLORBOND "PALE EUCALYPT".
- OPTUS NOTES:**
- 1. REMOVE EXISTING OPTUS HUAWEI BBU AND DCDU FROM THE RACK AT G001F04.
 - 2. INSTALL NEW 1x ERICSSON BBU6672 FOR L7/NL9/L18/NL21/L26/NR35 IN RACK AT G001F04.
 - 3. INSTALL NEW DCDU (1 OFF) TO POWER UP ERICSSON BBUs IN RACK AT G001F04.
 - 4. ALL EXTERNAL ALARMS (ENVIRONMENTAL ETC) TO BE MIGRATED FROM UMTS BBU TO LTE/5G BBU, AS PER OPTUS STANDARDS, INCLUDING OM36991 RAN EQUIPMENT I&C STANDARDS.
 - 5. ALL 3G CONTROLLED RET'S TO BE MIGRATED TO 4G/5G AS REQUIRED, ACCORDING TO OPTUS STANDARDS, INCLUDING OM38040 MIMO PORT PLUMBING BTS RET CONTROL DEPLOYMENT.
 - 6. REMOVE ANY ON-SITE CCU'S AND CONVERT CCU CONTROLLED MHA'S TO BTS CONTROLLED
 - 7. EXISTING KRONE PANEL TO BE UPGRADED TO RJ45 PATCH PANEL. INSTALL 1x 6610 FOR PSU ALARM AT G000F02.
- iDCDP NOTES:**
- 8. REUSE EXISTING OPTUS 22-WAY LENMIC iDCDP (1 OFF) IN RACK AT G001F05. AND SWAP CBs ON PSU AND iDCDP AS PER LATEST GUIDELINE.
- HYBRID CABLE NOTES:**
- 9. REUSE EXISTING OPTUS H&S 9/18 HYBRID CABLE (1 OFF) (LENGTH: 40m) AND SHARED H&S 9/18 HYBRID CABLE (1 OFF) (LENGTH: 40m)
- DC POWER UPGRADE:**
- 10. REMOVE EXISTING OPTUS HUAWEI PSU (1 OFF) WITH EXISTING 3kW RECTIFIERS (6 OFF) AND LPFG12-100S BATTERY STRINGS (5 OFF) FROM THE RACK AT G000F03.
 - 11. INSTALL NEW OPTUS 27kW VERTIV PSU WITH NEW 3kW RECTIFIERS (6 OFF) AT G000F03. UNEQUIPPED RECTIFIER MODULE POSITIONS IN OPTUS PSU MUST HAVE BLANKING PLATES FITTED.
 - 12. INSTALL NEW LFeLi-48100ZN BATTERIES (5 OFF) IN RACK AT G000F03.
 - 13. REPLACE EXISTING 32A 1P CB (3 OFF) WITH NEW 40A 1P CB (3 OFF) FOR OPTUS PSU ON THE DISTRIBUTION BOARD.
 - 14. OPTUS POWER TOOL V12.7 APPROVED.
 - 15. DIVERSIFY Tx FEEDS OVER 2 PSUs. APDP FEED A ON OPTUS PSU-1-0. FEED B ON VODAFONE PSU-1-V.
- AC POWER UPGRADE:**
- 16. EXISTING OPTUS 50A THREE PHASE POWER SUPPLY IS SUFFICIENT FOR THE PROPOSED UPGRADE.
- VODAFONE NOTES:**
- 17. REMOVE EXISTING VODAFONE HUAWEI BBU AND DCDU FROM THE RACK AT G001F02.
 - 18. INSTALL NEW NOKIA AIRSCALE/AMID CHASIS 1 OFF WITH SUITABLE BB CARDS AS PER EBP IN RACK AT G001F02.
 - 19. NOKIA AIRSCALE SHALL BE POWER UP VIA VODAFONE PSU IN RACK AT G000F04.
 - 20. NOKIA Tx ROUTER TO BE RELOCATED FROM RU7 TO RU18 OR HIGHER POSITION AT G000F02
- iDCDP NOTES:**
- 21. REUSE EXISTING VODAFONE 22-WAY LENMIC iDCDP (1 OFF) IN RACK AT G001F05. AND SWAP CBs ON PSU AND iDCDP AS PER LATEST GUIDELINE.
- HYBRID CABLE NOTES:**
- 22. REUSE EXISTING VODAFONE H&S 9/18 HYBRID CABLE (1 OFF) (LENGTH: 40m) AND INSTALL NEW H&S 9/18 (10mm²) HYBRID CABLES (1 OFF) (LENGTH: 40m)

1. THE CONTRACTOR SHALL COMPLY WITH THE REQUIREMENTS OF THE SPECIFICATIONS FOR ALL WORKS AND REQUIREMENTS UNLESS NOTED OTHERWISE.
2. THE CONTRACTOR OR REPRESENTATIVE SHALL BE RESPONSIBLE FOR LIAISONS WITH THE PROPERTY OWNER REGARDING CONSTRUCTION OF THE INSTALLATION. THE PROPERTY MUST REMAIN SERVICEABLE AND OPERATIONAL AT ALL TIMES UNLESS AGREED WITH THE PROPERTY OWNER.
3. THE CONTRACTOR SHALL CONFIRM ALL DIMENSIONS ON SITE PRIOR TO FABRICATION AND CONSTRUCTION.
4. REFER TO GIVEN DIMENSIONS ONLY, DRAWINGS SHOULD NOT TO BE SCALED. DIMENSIONS ARE IN MILLIMETRES UNO.
5. SPECIFIED PRODUCTS (OR THEIR APPROVED EQUIVALENTS) SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.
6. THE CONTRACTOR SHALL USE DROP SHEETS OR ANY OTHER METHOD DEEMED NECESSARY TO PROTECT THE EXISTING BUILDING FROM DAMAGE DURING CONSTRUCTION.
7. NORTH POINT AS SHOWN ON DRAWINGS INDICATES MGA NORTH (GDA 94 DATUM) UNLESS NOTED OTHERWISE.
8. ANTENNA AZIMUTHS ARE SPECIFIED IN DEGREES REFERENCED TO TRUE NORTH (TN).
9. ALL LEVELS ARE EXPRESSED IN METRES TO AUSTRALIAN HEIGHT DATUM (AHD).

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SET OUT OF THE SHELTER OR OUTDOOR UNITS IN ACCORDANCE WITH THE DESIGN INTENT AS SHOWN ON THE DRAWINGS.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SET OUT OF THE CABLE LADDER IN ACCORDANCE WITH THE DESIGN INTENT AS SHOWN ON THE DRAWINGS.
3. CONCRETE WORKS TOLERANCES SHALL COMPLY WITH CLAUSE 17.5 OF AS 3600.
4. STRUCTURAL STEELWORK TOLERANCES SHALL COMPLY WITH CLAUSE 15.3 OF AS 4100.

CONSTRUCTION DETAILS ON OPTUS STANDARD DRAWINGS SHALL BE ONLY BE USED WITHIN THE SPECIFIED DESIGN CRITERIA. THE OPTUS DESIGN CONSULTANT SHALL CONFIRM APPLICABILITY TO THE SITE. THE OPTUS CONTRACTOR SHALL CONFIRM ACTUAL SITE CONDITIONS ARE SAME AS STATED ON THE STANDARD DRAWINGS REFERENCED.

1. ALL MATERIALS AND WORKMANSHIP TO BE IN ACCORDANCE WITH AS 4100, AS 1657 AND AS/NZS 1554.1.
2. ALL STEELWORK SHALL BE IN ACCORDANCE WITH AS/NZS 3679.1 (GRADE 300) FOR HOT-ROLLED SECTIONS AND BARS), AS/NZS 3678 (GRADE 250) FOR HOT-ROLLED PLATES AND AS 1163 (GRADE 250 (MIN)) FOR HOLLOW SECTIONS.
3. THE CONTRACTOR SHALL CONFIRM ALL DIMENSIONS ON SITE PRIOR TO FABRICATION.
4. ALL PREFABRICATED STEELWORK SHALL BE HOT-DIP GALVANISED AFTER FABRICATION, IN ACCORDANCE WITH AS/NZS 4680. PLUG AND SEAL WATERTIGHT ANY HOLES MADE FOR GALVANISING.
5. THE CONTRACTOR SHALL PROVIDE ALL CLEATS AND HOLES NECESSARY FOR FIXING STEEL TO STEEL AND TIMBER TO STEEL, WHETHER OR NOT DETAILED ON THE STEELWORK DRAWINGS.
6. UNLESS SPECIFIED OTHERWISE, WELDS SHALL BE GENERAL PURPOSE (GP) CONTINUOUS FILLET WELDS. DEFAULT SIZE IS LESSOR OF 6mm AND THICKNESS OF THE THINNEST PART BEING JOINED. STRUCTURAL PURPOSE (SP) WELDS SHALL BE SELECTED FOR STRUCTURES SUBJECT TO FATIGUE.
7. ANY CUTS, HOLES AND WELDS TO EXISTING STEELWORK SHALL BE TREATED WITH 'COLD-GAL' ZINC RICH PAINT.
8. BOLTS NOT DESIGNATED SHALL BE GRADE 8.8 TO AS/NZS 1252 AND 'SNUG' TIGHTENED.
9. ALL BOLTS AND U-BOLTS SHALL BE SNUG TIGHTENED AND SECURED WITH FLAT WASHER AND SPRING WASHER (UNLESS SPECIFIED OTHERWISE).
10. PROVIDE APPROVED NEOPRENE (OR EQUIVALENT) WASHERS AND COLLARS AT ALL DISSIMILAR METAL INTERFACES.
11. ALL CHEMICAL AND MECHANICAL MASONRY ANCHORS SHALL BE STAINLESS STEEL (UNLESS SPECIFIED OTHERWISE) AND INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATION.
12. TWO-HOLE EARTH LUGS SHALL BE PROVIDED ON ALL MOUNTS, EXCEPT ON STEEL MONOPOLES, LATTICE TOWERS AND GUYED MASTS.

1. ALL CONCRETE WORK SHALL COMPLY WITH THE CURRENT ISSUE OF AS 3600 AND OTHER RELEVANT STANDARDS REFERENCED THEREIN.
2. UNLESS SPECIFIED OTHERWISE, CONCRETE MIX SHALL CONTAIN PORTLAND CEMENT TYPE GP OR GB, 20mm GRADED COARSE AGGREGATE AND ACHIEVE 80mm SLUMP AT POINT OF DELIVERY.
3. UNLESS SPECIFIED OTHERWISE, CONCRETE COMPRESSIVE STRENGTH AT 28 DAYS (f'_c) SHALL BE 32 MPa.

1. ALL MASONRY WORK SHALL CONFORM WITH THE CURRENT ISSUE OF AS 3700 AND OTHER STANDARDS REFERENCED THEREIN.
2. BUILD IN AS NECESSARY, LINTELS, FRAMES, BOLTS, LUGS, WALL TIES AND METALWORK.
3. CAREFULLY POSITION OPENINGS FOR OTHER TRADES TO ELIMINATE CUTTING.
4. BED JOINTS ARE TO BE 10mm THICK.
5. BEFORE LAYING MASONRY UNITS, ENSURE THAT THE BASE IS CLEAN AND FREE OF LAITANCE.
6. INSTALL WIRING FOR POWER AND OTHER CONDUITS WITHIN BLOCK CORES (WHERE APPLICABLE). DO NOT CUT CHASES IN HOLLOW BLOCKWORK.
7. ALL WALL INTERSECTIONS SHALL BE OF BONDED CONSTRUCTION OR TIED TO EXISTING WITH MEDIUM DUTY (MIN) TIES AT 400mm CENTRES VERTICALLY.

1. THE ELECTRICAL INSTALLATION SHALL COMPLY WITH THE RELEVANT CODES, STANDARDS, RULES, AND REGULATIONS OF STATUTORY AUTHORITIES. IN PARTICULAR: STATE SERVICE AND INSTALLATION RULES, AS/NZS 3000 WIRING RULES, AS3015, AS/NZS 3017 AND THE SUPPLY AUTHORITY REGULATIONS.
2. THE LOCATIONS AND MOUNTING HEIGHTS OF THE NEW INSTALLATION SHOWN ON THE SITE DRAWINGS IS INDICATIVE ONLY. THE FINAL LOCATIONS AND HEIGHTS SHALL BE DETERMINED ON SITE TO SUIT THE CLIENT AND THE INSTALLATION. THE CONTRACTOR SHOULD VISIT THE SITE DURING THE TENDER PERIOD TO BECOME FAMILIAR WITH THE SCOPE OF WORK.
3. ALL REQUIREMENTS FOR INSTALLATIONS REGARDING SUPPLY ARRANGEMENTS, PROVISION OF SERVICE CABLES AND CONSUMER MAINS AND METERING SHALL BE IN ACCORDANCE WITH AS/NZS 3000 AND RELEVANT STATE SERVICE AND INSTALLATION RULES.
4. A SEPARATE MEN EARTH ELECTRODE SHALL BE PROVIDED BY THE CONTRACTOR BELOW THE METER BOX AS REQUIRED.
5. ALL WIRING SYSTEMS SHALL BE INSTALLED AND ENCLOSED BY APPROVED METHODS WHICH WILL READILY PERMIT CABLES TO BE DRAWN IN OR REPLACED AFTER COMPLETION OF CONSTRUCTION.
6. CABLE MARKERS SHALL BE PROVIDED FOR UNDERGROUND WIRING FROM WITHIN THE PROPERTY BOUNDARY AND TO THE OPTUS INSTALLATION, AT THE COMMENCEMENT AND FINISH OF EACH ROUTE AND AT EACH CHANGE OF DIRECTION.
7. ALL EXISTING SURFACES, KERBS, GUTTERS, INVERTS, VEHICLE CROSSINGS AND PAVEMENTS DISTURBED AFTER INSTALLATION OF UNDERGROUND WIRING SHALL BE REINSTATED AND MADE GOOD BY THE CONTRACTOR.
8. LOCATE AND IDENTIFY ALL UNDERGROUND SERVICES BEFORE COMMENCING WORK.

1. EQUIPMENT AND ANTENNA MOUNTS SHALL BE EARTHED IN ACCORDANCE WITH THE EARTHING SPECIFICATION (OSD-030).
2. ALL EXTERIOR EARTH TAPE ELECTRODES SHALL BE COPPER BONDED HARDENED STEEL UNLESS OTHERWISE NOMINATED ON THE SITE DRAWINGS.
3. THE EARTHING SYSTEM SHALL BE CHECKED FOR CONTINUITY AND IMPEDANCE SHALL BE MEASURED AND A WRITTEN TEST REPORT PROVIDED.
4. EARTHING ELECTRODES SHALL BE INSTALLED AT A DEPTH OF NOT LESS THAN 3 METRES UNLESS NOTED OTHERWISE.

1. EXISTING SERVICES SHOWN ON SITE DRAWINGS IS REPRESENTATIVE OF AVAILABLE INFORMATION (OBTAINED FROM LOCAL AUTHORITIES) AND THE SITE SURVEY.
2. SERVICES INFORMATION SHALL BE READ IN CONJUNCTION WITH THE RELEVANT LOCAL AUTHORITIES DRAWINGS TO CONFIRM ACCURACY AND COMPLETENESS.
3. ADDITIONAL UNDOCUMENTED SERVICES MAY BE PRESENT ON SITE. FOR INFORMATION OF UTILITY UNDERGROUND SERVICES CALL 1100 'DIAL BEFORE YOU DIG'.
4. THE CONTRACTOR SHALL IDENTIFY AND CONFIRM THE LOCATION OF ALL RELEVANT UNDERGROUND SERVICES PRIOR TO COMMENCEMENT OF THE WORKS USING MANUAL POTHOLING OR OTHER APPROVED MEANS.



HUAWEI TECHNOLOGIES (AU) PTY LTD
ABN 49 103 793 800

SYDNEY
LEVEL 6 TOWER B 799 PACIFIC HIGHWAY
CHATSWOOD NSW 2067
TEL: +61 2 9928 3888 FAX: +61 2 9411 8533

MELBOURNE
LEVEL 24 459 COLLINS STREET
MELBOURNE VIC 3000
TEL: +61 3 8610 0600 FAX: +61 3 9621 1575

OPTUS

MOBILE NETWORK
AUSTRALIA

OPTUS STANDARD
DRAWING



STANDARD CONSTRUCTION NOTES

Drawing Status:
FOR CONSTRUCTION

Drawing No.
OSD-100

Revision
C

SIGNAGE LEGEND

SIGN NAME	SYMBOL	SIGN IMAGE	SIGN NAME	SYMBOL	SIGN IMAGE	SIGN NAME	SYMBOL	SIGN IMAGE	SIGN NAME	SYMBOL	SIGN IMAGE
MERCS-1 (ACCESS RESTRICTION SIGN)	M-1		MERCS-9 (IN-BUILDING ANTENNA SIGN)	M-9		MERCS-19 (SMALL CELL ISOLATION SWITCH SIGN AFFIXED NO HIGHER THAN 4m AGL TYP.)	M-19		OPTUS ISOLATION SWITCH (MICROCELL RF SHUTDOWN SIGN)	O.I.S.	
MERCS-2 (MCF INFORMATION SIGN)	M-2		MERCS-10 (REPEATER ANTENNA SIGN)	M-10		MERCS-20 (GENERIC ADJACENT RF HAZARD SIGN)	M-20				
MERCS-3 (NO PEDESTRIAN ACCESS GENERAL PUBLIC SIGN)	M-3		MERCS-14 (ISOLATION SWITCH SIGN)	M-14		HAZARDOUS VOLTAGE SIGN ON METER BOX	H.V.				
MERCS-4 (NO PEDESTRIAN ACCESS OCCUPATIONAL SIGN)	M-4		MERCS-15 (MACRO SIGN AT 3.5m ABOVE AGL TYP.)	M-15		SITE ENQUIRY SIGN (LOCATE 1500 AGL TYP.)	S.E.				
MERCS-5 (ANTENNA SIGN)	M-5		MERCS-16 (MACRO SIGN)	M-16		KEEP OUT SIGN (LOCATE 1500 AGL TYP.)	K.O.				
MERCS-6 (MICROWAVE ANTENNA SIGN)	M-6					KEEP OFF ROOF SIGN (LOCATE AT EDGE OF ROOF AT POINT OF ACCESS)	K.O.R.				
MERCS-7 (CONCEALED ANTENNA SIGN)	M-7		MERCS-17 (STREET LIGHT SIGN)	M-17		LOAD EXCLUSION SIGN (LOCATE 1500 AGL TYP.)	L.E.				
MERCS-8A (MICROCELL SIGN 2m)	M-8A					EQUIPMENT LOADING SIGN (LOCATE 1500 AGL TYP.)	E.L.				
MERCS-8B (MICROCELL SIGN 1m)	M-8B		MERCS-18 (SMALL CELL SIGN)	M-18		LADDER USE SIGN (LOCATE 1500 AGL TYP. TYP.)	L.U.				
MERCS-8C (MICROCELL SIGN 0.5m)	M-8C					WALKWAY SIGN (ON WALKWAY OR HANDRAIL)	W.				

- NOTES:
- REFER TO CURRENT RFSP, MANUAL 2 "PREFERRED SITE SIGNAGE" FOR EME SIGNAGE REQUIREMENTS AND INSTALLATION REQUIREMENTS.
 - REFER TO SECTION 5 OF THE OPTUS MOBILE NETWORK DRAWING SPECIFICATION (OSD-070) FOR DRAWING REQUIREMENTS.
 - REFER TO SECTION 6 OF THE OPTUS DESIGN & CONSTRUCTION SPECIFICATION (OSD-010) FOR SIGNAGE DETAILS INCLUDING SIZE, MATERIALS AND FIXING.
 - THIS IS A TEMPLATE DRAWING ONLY. ACTUAL SITE DRAWING MUST BE PRODUCED TO REFLECT SITE SPECIFIC CONDITION.

Rev	Date	Revision Details	Consultant	CAD	Designer	Verifier	Approver
B	10.10.23	SMALL CELL DRAWING REMOVED	VENTIA	UH	RY	-	-
A	05.04.22	REVISED AND CONSOLIDATED OSD-170, OSD-180 AND OSD-191 INTO THIS DRAWING ADDED NEW TYPICAL SMALL CELL DRAWING DETAILS OF THE CHANGES AND REQUIREMENTS ARE IN OSD-070 SECTION 5.14	KORDIA	UH	RY	-	-



Level 8, 80 Pacific Hwy, North Sydney, NSW 2060
www.ventia.com



Client:
Project:
MOBILE NETWORK
AUSTRALIA
SITE No:- OPTUS
STANDARD DRAWING

Drawing Title:
SIGNAGE LEGEND AND NOTES

Drawing Status:
FOR CONSTRUCTION

Drawing No.
OSD-171-3

Revision
B